



QUICK DAUGHTER CARD INSTALLATION INSTRUCTIONS

This page contains step-by-step illustrated instructions on how to install a daughter card into the ATM Interface Module.




CAUTION: To prevent ESD-related damage:

- Make sure that you are properly grounded. Use a footstrap and a grounded mat, or wear a grounded wrist strap, ensuring that the strap makes good skin contact.
- Keep the module/daughter card in its antistatic bag until you are ready to install it.


Installation

To install a daughter card you will need a #2 Phillips screwdriver and the screws and washers supplied with the daughter card.


- 1 Hold the card with the beige bridge connector facing downward and the protective plugs facing forward and insert the card into the left cutout from the back of the ATM Interface Carrier Module

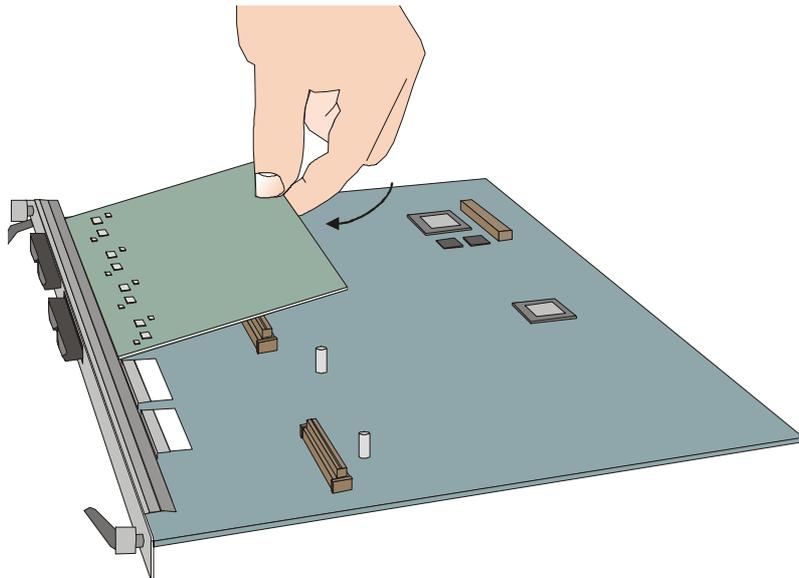

- 2 Fasten the beige bridge connectors.

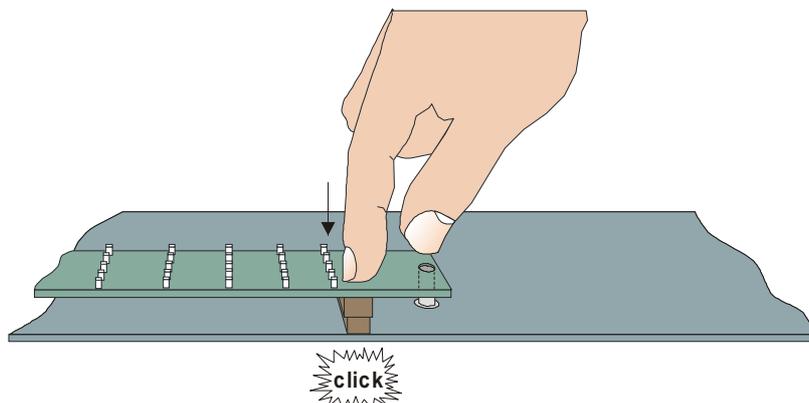

- 3 Insert the supplied screws into the front panel and tighten.

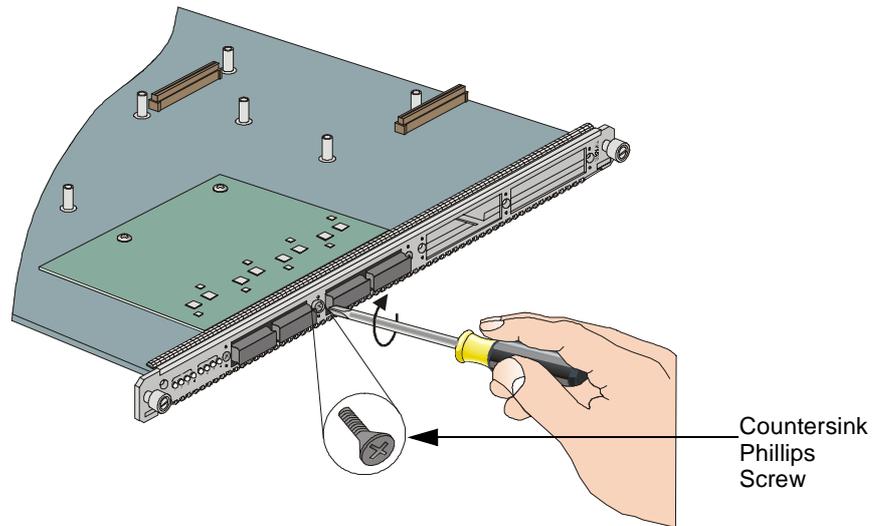

- 4 Insert the supplied screws and washers into the daughter card and tighten.

